

**PHILIPS**

Essential SmartBright

LED Downlight



**Experience**  
hassle-free installation  
With reliable and compact design that is cost efficient



## Features and benefits

- 1 Easy installation and replacement**
  - Good range of wattages and color temperatures enhances flexibility and choice.
  - Three standard cut-out sizes (5", 6", 7") ensure easy retrofit.
- 2 Compact design for greater functionality and versatility**
  - Slim design with integrated driver. (exclusive to Philips)
  - Flat design fits tight spaces, enabling easy installation into low suspension ceilings or false ceilings.
  - Compact, all-in-one design makes installation a breeze.
  - Installation clip spring can be used with ceilings of various thickness and materials.
- 3 Leading brand with safety and quality assurance**
  - Meets international standards and certifications.
  - Reliability and quality that offers peace of mind.
  - LED technology ensures long lifespan with minimal maintenance, bringing you value for money, and cost savings in electricity bills in the long-run.




## High performance downlight that meets your needs

With so many LED downlights available in the market, how do you choose the best option for your project or home? The Philips Essential SmartBright LED Downlight simplifies that decision. Boasting good quality and reliable performance, coupled with an affordable price tag, it offers you the best value in the market.

The slim and compact design makes the Essential SmartBright LED Downlight highly versatile. It can be installed easily even when space is a constraint, such as in low suspension or false ceilings. It comes with an integrated driver, so installation is effortless and time-saving.

Philips Essential SmartBright LED Downlight promises long-lasting LED performance, functionality and cost-savings. Designed with your needs in mind, it is your ideal choice for commercial and retail spaces, public areas corridors, offices and homes.

## Dimensional drawing

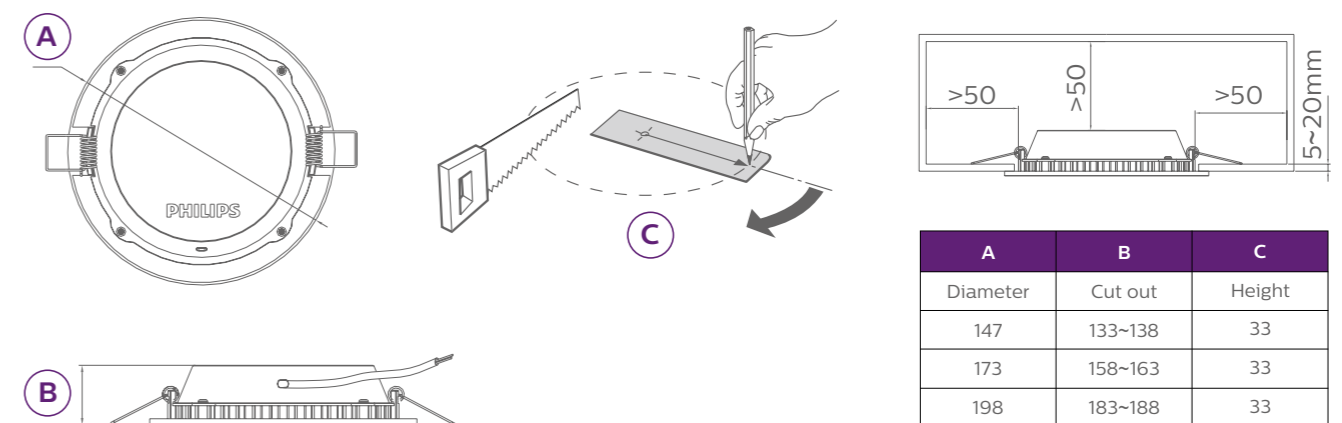

All dimensions in mm

# Product data

<b>Housing</b>	Aluminium die cast
<b>Housing paint</b>	White, RAL9003
<b>Diffusor</b>	PMMA
<b>Cut-out</b>	133~138mm, 158~163mm, 183~188mm
<b>Height</b>	33mm
<b>Voltage/frequency</b>	220-240V, 50/60Hz
<b>Power factor</b>	0.75~0.8
<b>Wattage</b>	11/15/20w
<b>Connecting method</b>	Flying wire with easy terminal offered
<b>Color temperature</b>	3000/4000/6500k
<b>Lumen output</b>	600/900/1200lm
<b>Color rendering index</b>	70+
<b>Ta</b>	25°C
<b>Operation temperature</b>	-20~40°C
<b>Lifetime</b>	15,000 Hrs (L70 B50)
<b>Package</b>	6 units in one carton

## Ordering information

Product description	Cut-out size	Dimension	CCT	Lumen Output	Voltage	Frequency	Input current	Wattage	Power factor	Driver output current	Order code
	(mm)	(mm)	(K)	(lm)	(V)	(Hz)	(mA)	(W)	(λ)	(mA)	12NC
DNO24B LED9/WW D125	133~138	ø147x33	3000	900	220-240	50/60	78	15	0.75	345	911401814999
DNO24B LED9/NW D125	133~138	ø147x33	4000	900	220-240	50/60	78	15	0.75	345	911401815099
DNO24B LED9/CW D125	133~138	ø147x33	6500	900	220-240	50/60	78	15	0.75	345	911401815199
DNO24B LED6/WW D125	133~138	ø147x33	3000	600	220-240	50/60	60	11	0.75	275	911401815299
DNO24B LED6/NW D125	133~138	ø147x33	4000	600	220-240	50/60	60	11	0.75	275	911401815399
DNO24B LED6/CW D125	133~138	ø147x33	6500	600	220-240	50/60	60	11	0.75	275	911401815499
DNO24B LED12/WW D150	158~163	ø173x33	3000	1200	220-240	50/60	110	20	0.8	450	911401815599
DNO24B LED12/NW D150	158~163	ø173x33	4000	1200	220-240	50/60	110	20	0.8	450	911401815699
DNO24B LED12/CW D150	158~163	ø173x33	6500	1200	220-240	50/60	110	20	0.8	450	911401815799
DNO24B LED9/WW D150	158~163	ø173x33	3000	900	220-240	50/60	78	15	0.75	345	911401815899
DNO24B LED9/NW D150	158~163	ø173x33	4000	900	220-240	50/60	78	15	0.75	345	911401815999
DNO24B LED9/CW D150	158~163	ø173x33	6500	900	220-240	50/60	78	15	0.75	345	911401816099
DNO24B LED6/WW D150	158~163	ø173x33	3000	600	220-240	50/60	60	11	0.75	275	911401816199
DNO24B LED6/NW D150	158~163	ø173x33	4000	600	220-240	50/60	60	11	0.75	275	911401816299
DNO24B LED6/CW D150	158~163	ø173x33	6500	600	220-240	50/60	60	11	0.75	275	911401816399
DNO24B LED12/WW D175	183~188	ø198x33	3000	1200	220-240	50/60	110	20	0.8	450	911401816499
DNO24B LED12/NW D175	183~188	ø198x33	4000	1200	220-240	50/60	110	20	0.8	450	911401816599
DNO24B LED12/CW D175	183~188	ø198x33	6500	1200	220-240	50/60	110	20	0.8	450	911401816699
DNO24B LED9/WW D175	183~188	ø198x33	3000	900	220-240	50/60	78	15	0.75	345	911401816799
DNO24B LED9/NW D175	183~188	ø198x33	4000	900	220-240	50/60	78	15	0.75	345	911401816899
DNO24B LED9/CW D175	183~188	ø198x33	6500	900	220-240	50/60	78	15	0.75	345	911401816999
DNO24B LED6/WW D175	183~188	ø198x33	3000	600	220-240	50/60	60	11	0.75	260	911401817099
DNO24B LED6/NW D175	183~188	ø198x33	4000	600	220-240	50/60	60	11	0.75	260	911401817199
DNO24B LED6/CW D175	183~188	ø198x33	6500	600	220-240	50/60	60	11	0.75	260	911401817299

